




268FR TAPE

Black Fire Retardant Tape

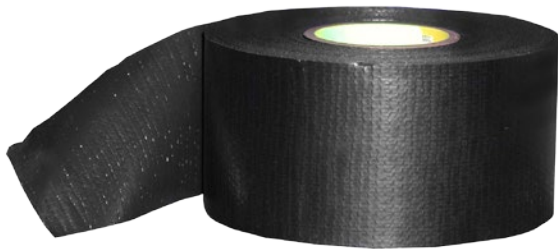

PRODUCT DESCRIPTION

A superior flame retardant sealing duct tape with acrylic coated cloth and a natural rubber adhesive that self-extinguishes. It is non-corrosive to copper wire, easy to tear and offers exceptionally aggressive adhesive to a variety of substrates such as steel and plastic.

Meets ASTM D 568 - ISO 3795

APPLICATIONS

- ▶ Wire Harness Insulation
- ▶ Wire Bundling
- ▶ Duct Work

PRODUCT USE

This tape can be used in areas where flame retardancy is required such as sealing duct work, wire harness insulation and bundling applications.

SIZE AND PACKAGING

Rolls sold individually in sizes of 2" x 100'

PROPERTIES	TEST METHOD	IMPERIAL VALUES	METRIC VALUES
Adhesion to Steel	PSTC-	60 oz/in	67.2 g/mm
Tensile	PSTC-31	25 lb/in	0.45 kg/mm
Thickness	ASTM D1000	8.5 mil	0.22 mm

NOTE: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. AMERICOVER, INC. MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage. Limited Warranty available at www.Americover.com

OP.000000.062117